

DS-2CE56C2T-IR


HD720P Turbo HD IR Turret Camera



Key features

- HD720P Video Output
- Adopt HDTV Technology
- True Day/Night
- DNR, Smart IR
- 20m IR distance
- IP66 weatherproof

Dimensions

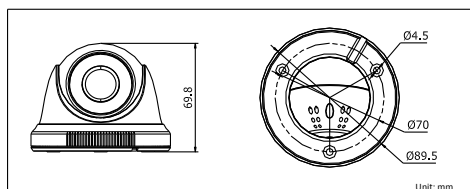

Accessories



Indoor/outdoor wall mount
DS-1272ZJ-110-TRS



Video balun
DS-1H18

Available models

DS-2CE56C2T-IR

| DS-2CE56C2T-IR | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 1/3" Progressive Scan CMOS |
| Effective Pixels | 1280(H)*960(V) |
| Min. Illumination | 0.01 Lux @(F1.2,AGC ON), 0 Lux with IR |
| Shutter Time | 1/25(1/30) s to 1/50,000 s |
| Lens | 2.8mm, 3.6mm, 6mm optional Angle of View: 74.6°(3.6mm), 92.6°(2.8mm), 49°(6mm) |
| Lens Mount | M12 |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 75°, Rotation: 0 - 360° |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Frame Rate | 25 fps (PAL) |
| HD Video Output | 1 Analog HD output |
| S/N Ratio | More than 62dB |
| General | |
| Working Temperature/ Humidity | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC |
| Power Consumption | Max. 4W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 20m |
| Dimensions | 89.6 × 69.8 mm (3.52" × 2.75") |
| Weight | 280 g |

港澳區代理：